


# MERKEL U-RING NI 300

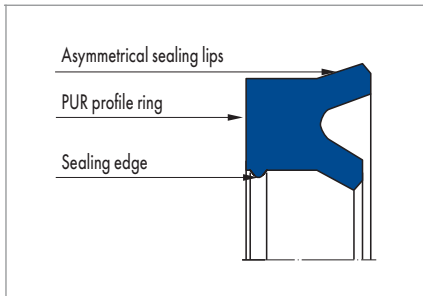

## PRODUCT DESCRIPTION

Merkel U-ring with asymmetrical profile, inner lip set back, additional support edge and sealing edge as well as press fit at the outside diameter.

## PRODUCT ADVANTAGES

Single-acting rod seal for standardised housings, amongst others, according to ISO 5597.

- Very good static and dynamic tightness
- Additional sealing edge, prevents ingress of dirt to a large degree
- Recommended for use in combination with single-acting wipers

## APPLICATION

- Earth moving equipment
- Cranes
- Presses
- Support cylinders

## MATERIAL

Material	Code	Hardness
Polyurethane	94 AU 925	90 Shore A

## OPERATING CONDITIONS

Pressure p	40 MPa
------------	--------

Running speed v	0,5 m/s
-----------------	---------

Medium/ Temperature	94 AU 925
Hydraulic oils HL, HLP	-30 °C ... +110 °C
HFA fluids	+5 °C ... +50 °C
HFB fluids	+5 °C ... +50 °C
HFC fluids	-30 °C ... +40 °C
HFD fluids	-
Water	+5 °C ... +40 °C
HETG (rapeseed oil)	-30 °C ... +60 °C
HEES (synthetic ester)	-30 °C ... +60 °C
HEPG (glycol)	-30 °C ... +40 °C
Mineral greases	-30 °C ... +110 °C

## DESIGN NOTES

Please observe our general design notes in → Technical Manual.

### Surface quality

Peak-to-valley heights	$R_a$	$R_{max}$
Sliding surface	0,05 ... 0,3 $\mu\text{m}$	$\leq 2,5 \mu\text{m}$
Groove base	$\leq 1,6 \mu\text{m}$	$\leq 6,3 \mu\text{m}$
Groove flanks	$\leq 3,0 \mu\text{m}$	$\leq 15,0 \mu\text{m}$

Percentage contact area  $M_r > 50\%$  to max. 90% at cutting depth  $c = R_z/2$  and reference line  $C_{ref} = 0\%$ .

### Admissible gap dimension

The decisive factor for the function of the seal is the largest gap dimension occurring during operation on the non-pressurised side of the seal. → Technical Manual.

Profile dimension	16 MPa	26 MPa	32 MPa	40 MPa
>4,0 mm ... $\leq 5,0$ mm	0,50 mm	0,40 mm	0,35 mm	0,30 mm
>5,0 mm ... $\leq 7,5$ mm	0,55 mm	0,45 mm	0,40 mm	0,35 mm
>7,5 mm ... $\leq 12,5$ mm	0,66 mm	0,50 mm	0,45 mm	0,40 mm
>12,5 mm	0,60 mm	0,55 mm	0,50 mm	0,45 mm

### Tolerances

The admissible gap width, tolerances, guide play and deflection of the guide under load are to be taken into account when designing D2. → Technical Manual.

Nominal $\varnothing d$	D	d
4 ... 260 mm	H11	f8

## FITTING & INSTALLATION

Careful fitting is a prerequisite for the correct function of the seal. → Technical Manual.